



**Minimalistic and Artistic
2~4m Height Application
LED Wall Washer Light**

WWL4336


Features

- Minimalistic appearance design.
- High-precision vents for greater performance, increased durability, and higher reliability.
- High-strength aviation aluminum housing.
- Highly reliable and impact-resistant toughened glass.
- Optical dark-free zone design for seamless splicing of light.
- Multiple options of visually comfortable and precise optical lens.
- International standard DMX512 protocol.





RAL7012 RAL9006 RAL9003


Light Distribution Curve




H (m)	E (lx)	D (m)
		12°
1	27905	0.21
2	6976	0.42
3	3101	0.63
4	1744	0.84
5	1116	1.05



H (m)	E (lx)	D (m)	C ₀	C ₉₀
			45°	12°
1	10290	0.83	0.21	
2	2573	1.66	0.42	
3	1143	2.49	0.63	
4	643	3.31	0.84	
5	412	4.14	1.05	



Dimensions

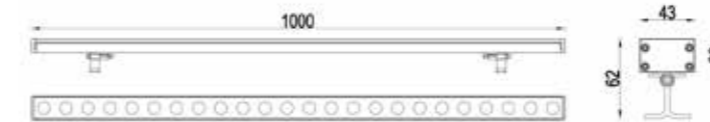

Specifications

Power Consumption	36W (CRI >80 SDCM 3)	36W	36W
Luminous Flux	2772 lm @3000K	1620 lm @RGB	1620lm @RGBW
Color Temperature	2700K / 3000K / 4000K / 5000K / 5700K / 6500K	RGB	RGBW
Beam Angle (50%Imax)	12° / 17° / 30° / 45° / 60° / 80° / 12*20° / 12*45°		
LED Brand	CREE / NICHIA / OSRAM / LUMILEDS		
Input Voltage	DC24V		
Protection Class IEC	III		
Control	DMX		
Finish	Powder coating		
Housing	Extruded aluminum 6063		
Cover	Toughened glass		
IP Rating	IP66		
IK Rating	IK06		
Mounting	Adjustable bracket		
Operating Temperature	-35°C ~ 60°C (-31°F ~ 140°F)		
Storage Temperature	-40°C ~ 70°C (-40°F ~ 158°F)		
Lifespan	>50,000Hrs (Ta=35°C@L70)		
Certificate	CE / RoHS / EMC		

